



DETAIL WATERPROOFING



- TRIFLEX CRYL FINISH 205 (THIXO IF VERTICAL > 250mm) @ 0.50 Kg/m² MIN.
- TRIFLEX PRODETAIL® @ 3.00 Kg/m² MIN.
- TRIFLEX 110g REINFORCEMENT FLEECE
- TRIFLEX SA CARRIER MEMBRANE
- TRIFLEX SPRAY FASTPRIME @ 0.08 Kg/m² MIN.
- TRIFLEX HD INSULATION (REFER TO PROJECT SPECIFICATION PROPOSAL)


MAIN AREA WATERPROOFING



- OPTIONAL: TRIFLEX MICROCHIPS @ 0.05 Kg/m²
- TRIFLEX CRYL FINISH 205 @ 0.50 Kg/m² MIN.
- TRIFLEX CRYL FINISH 205 @ 0.60 Kg/m² MIN. WITH TRIFLEX QUARTZ (0.3 - 0.6mm / 0.4 - 0.8mm) @ 4.00 Kg/m² APPROX.
- TRIFLEX PROFLOOR RS @ 4.00 Kg/m² MIN.
- TRIFLEX PRIMER (IF REQUIRED - REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC DIMENSIONALLY STABLE / SUITABLE SUBSTRATE (PREPARED)

NOTES

- 1 EDGE PROFILE
- 2 MECHANICAL FIXING OR ADHERE WITH TRIFLEX CRYL PASTE
- 3 TRIFLEX INSULATION ADHESIVE (OR MECHANICAL FIXINGS)
- 4 TRIFLEX HD INSULATION

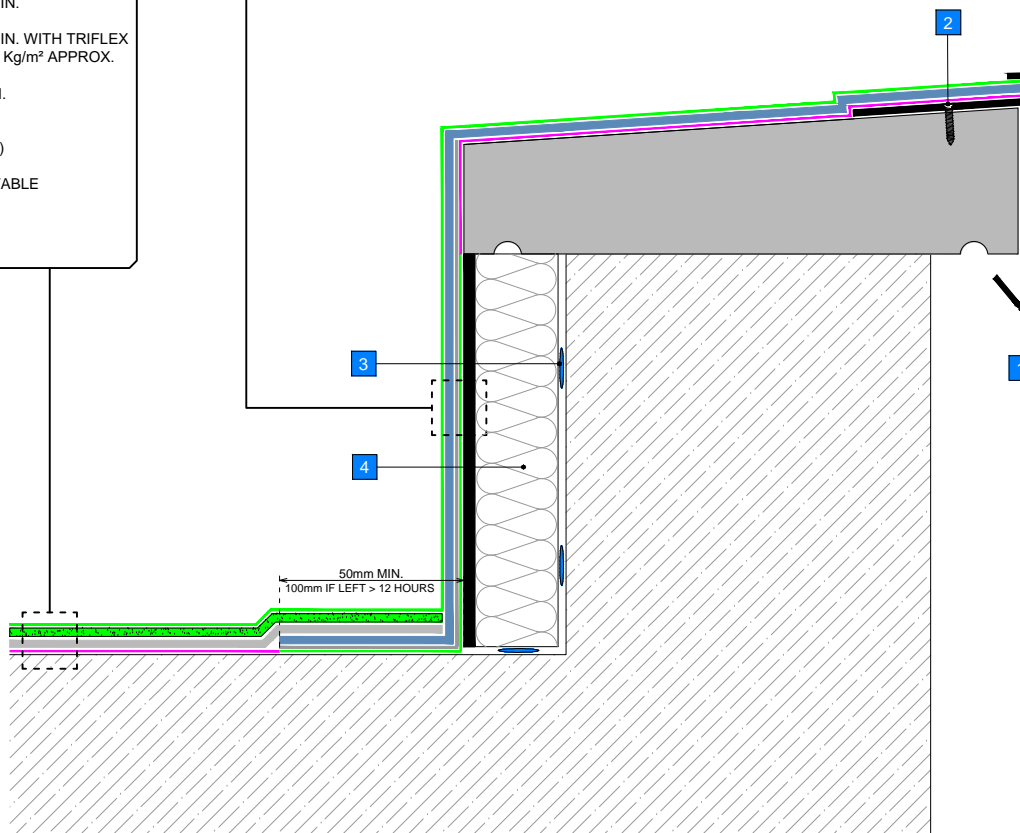

GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

INDICATIVE SYSTEM BUILD-UP



SYSTEM

TRIFLEX BFS COLOURSEAL - SMALL GRAIN QUARTZ

PROJECT

STANDARD

DETAIL

UPSTAND WITH COPING - ENCAPSULATED WITH HD INSULATION INFILL AND EDGE PROFILE

DRAWING NUMBER

BFS_CS_SGQ_015_UPSTAND WITH COPING-ENCAPSULATED WITH HD INSULATION INFILL AND EDGE PROFILE

SCALE

NTS

DATE

14/08/2018

Triflex
Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs
ST15 8JS | Tel: 01785 819119
www.triflex.co.uk | info@triflex.co.uk



WALKWAYS | BALCONIES | TERRACES