



DETAIL WATERPROOFING



- TRIFLEX PRODETAIL® @ 3.00 Kg/m² MIN.
- TRIFLEX 110g REINFORCEMENT FLEECE
- TRIFLEX PRIMER (IF REQUIRED - REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC SUBSTRATE (PREPARED)

NOTES

- 1 FULLY REINFORCED MEMBRANE DRESSED INTO CHASE
- 2 PROPRIETARY FLASHING
- 3 SEAL CHASE USING PROPRIETARY SOLVENT FREE MASTIC OR TRIFLEX CRYL PASTE

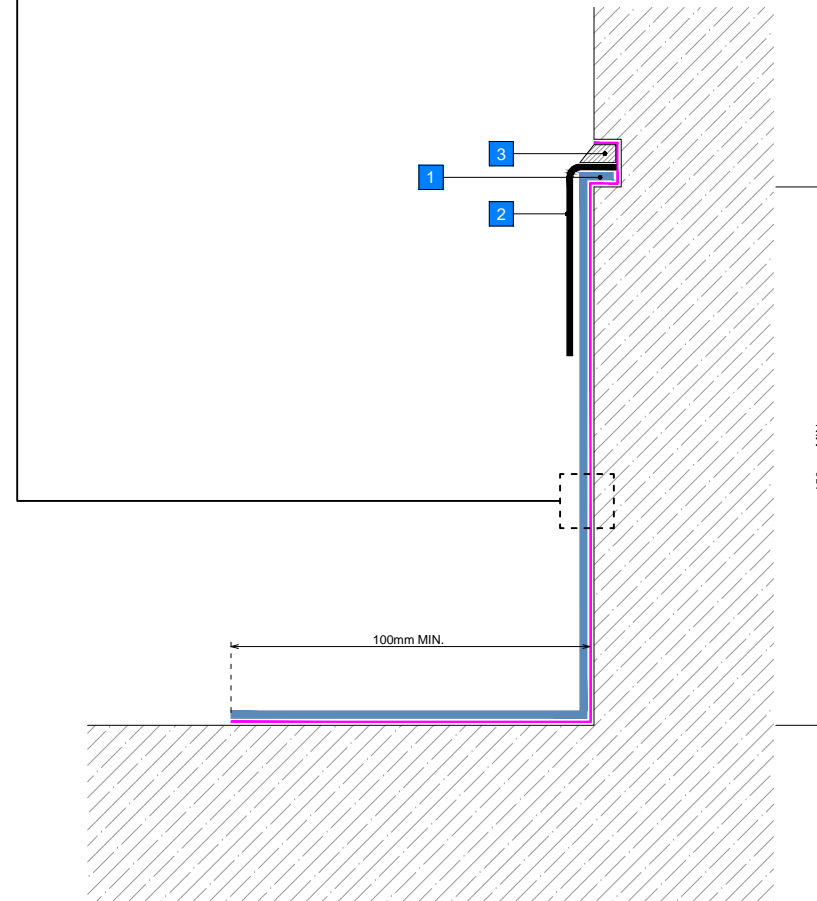

GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

INDICATIVE SYSTEM BUILD-UP



SYSTEM

TRIFLEX PRODETAIL®

PROJECT

STANDARD

DETAIL

UPSTAND WITH FLASHING / CHASE

DRAWING NUMBER

PRODETAIL_007_UPSTAND WITH FLASHING_CHASE

SCALE

NTS

DATE


08/08/2018

Triflex

Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs
ST15 8JS | Tel: 01785 819119
www.triflex.co.uk | info@triflex.co.uk



ROOFS | ROOF DETAILS | REPAIRS