# System overview

# Triflex ProDrain

#### Specialist vented solution for saturated and contaminated substrates

When a balcony, walkway or terrace has a saturated or contaminated substrate or features a failing buried membrane, it is not possible to successfully overlay these areas with a new waterproofing and surfacing system. In these instances, it is usually necessary to completely remove the existing substrate before refurbishment can begin, which is not only time consuming and costly but also causes disruption. This doesn't always need to be the case, as we have developed a specialist solution which can directly overlay these areas without removal of the existing substrate. Triflex ProDrain offers a safe, clean solution featuring a self-supporting isolating and venting sheet that enables the subsequent Triflex ProTerra waterproofing and surfacing system to be applied over it. It is ultra fast curing and cold liquid applied, allowing installation to be completed quickly, without the use of hot works, and with minimal impact on users. Available in four unique surface finishes, the completed solution also looks good and allows you to completely tailor the colour, texture and finish of your project.



# System highlights

#### **Ultimate refurbishment solution**

With Triflex ProDrain there is no need for the time consuming and costly removal of the existing substrate, even when it is saturated, contaminated or cracked. The installation of the unique self-supporting decoupling membrane enables the subsequent Triflex ProTerra waterproofing and surfacing system to be applied directly on top, and the thin layer build-up has minimal impact on thresholds. A safe, effective refurbishment solution that lasts.

#### Fast curing and rapid installation

Traditional refurbishments can take weeks to complete and are susceptible to further water ingress when the existing substrate is removed. Fast curing and easy to install, the entire solution can be installed in just a few days, allowing building to remain occupied during installation, limiting access restrictions and unecessary disruptions to everyday life.

## **Cold applied system**

There is no risk from hot works during installaltion as all our materials are applied in a totally cold liquid form, curing to create a solution that lasts.

#### Tough and durable protection

The demands of the walkway, balcony and terrace environment are no issue for TriflexProDrain. The system is unaffected by ponding water and resistant to chlorides (salts), carbon dioxide ingress, and approved de-icing and cleaning products. Protection that's built to last, with a low lifecycle cost.

#### Safety and environmental

Our solvent and isocyanate free resin technology has been assessed under BREEAM principles and can contribute to A+ ratings.

#### Versatile design

Available in four surface finishes, choose the perfect colour, texture and finish for your project - refer to Triflex colour card.

#### **Application areas**

- External walkways, balconies, terraces, pedestrian bridges and other pedestrian trafficked areas with saturated or contaminated substrates
- External walkways, balconies, terraces, pedestrian bridges and other pedestrian trafficked areas with buried membranes

### **Compatible substrates**

Cementitious substrates

#### **Suitable constructions**

- Cast in situ concrete
- Permanent formwork with in situ concrete
- Precast concrete planks with or without structural topping
- Precast double tee units with or without structural topping
- Steel / galvanised steel / structural plastic / timber constructions
- Insulated / warm deck build-ups

# **Approvals**

Approvals (Triflex ProTerra waterproofing and surfacing system)
Fully certified to the highest UK and European standards and classifications, including:



BBA certified - Certificate 13/5051 Product sheet 3

Durability: Under normal service conditions the system will have a service life of at least 15 years



EN 1504-2 certified (full system - large quartz):

B3.2 (-20°C) dynamic crack bridging

ETAG 005 certified (reinforced waterproofing membrane) 25 year expected working life




Root and rhizome resistant (reinforced waterproofing membrane): FLL Certified: Root and rhizome resistant

- Fire performance:
  - EN ISO-11925-2
  - EN ISO-9239-1
  - EN 13501-1
- NHBC accepted

#### **Manufacturer certification**

- ISO 9001 Quality Management
- ISO 14001 Environmental Management
- ISO 50001 Energy Management

# System build-up and consumptions



La	yer	Product	Consumption (1)	Aggregate / Broadcast	Overcoat / traffic <sup>(2)</sup>
0	Primer (if required)	Triflex ProDrain Primer	0.15l/m <sup>2</sup>	-	1 hour
2	Decoupling membrane	Triflex ProDrain Fix+ DC-MAT Decoupling Membrane	Adhesive: 4.00Kg/m² minimum Membrane: 1.00m²/m²	-	1 hour
3	Load distribution layer	Triflex Cryl Primer 276	2x 0.55Kg/m² per application	-	45 minutes per application
4	Waterproofing and surfacing system	Available in four surface finishes - refer to relevant Triflex ProTerra system overview:  • Triflex ProTerra Quartz Design  • Triflex ProTerra Colour Design  • Triflex ProTerra Chips Design  • Triflex ProTerra Stone Design			

<sup>(1)</sup> Minimum consumption assuming a smooth, even, non-absorbent substrate.

# Primary test data

#### Anti-skid

Tests carried out wet on new indicative samples in accordance with UKSRG Guidelines (2011). Based on HSE and UKSRG guidance a surface with a PTV of 36+ is classified as having a low slip potential.

#### Quartz Design

- With 0.7 1.2mm quartz:
  - PTV approx. 75 (Four S rubber / Slider 96)
  - PTV approx. 68 (TRRL rubber / Slider 55)
- With 0.4 1.2mm quartz:
  - PTV approx. 73 (Four S rubber / Slider 96)
  - PTV approx. 70 (TRRL rubber / Slider 55)
- With 0.4 0.8mm quartz:
  - PTV approx. 62 (Four S rubber / Slider 96)
  - PTV approx. 58 (TRRL rubber / Slider 55)
- With 0.3 0.6mm quartz:
  - PTV approx. 61 (Four S rubber / Slider 96)
  - PTV approx. 42 (TRRL rubber / Slider 55)

### **Colours and finishes**

Available in a wide range of colours - refer to Triflex colour card.

#### **Next steps**

To ensure a thorough understanding of the construction, the substrate and to determine the most appropriate specification, Triflex carries out free of charge surveys, testing, investigations and analysis prior to preparing a bespoke project specification proposal. To arrange a meeting or site visit please contact Triflex Customer Services.

The advice we provide on the application of our products is based on extensive development work as well as many years of experience and is given to the best of our knowledge. However, the wide variety of requirements for a building under the most diverse conditions means that it is necessary for the Contractor to test the product for suitability in any given case. Triflex reserve the right to make alterations in keeping with technical developments or improvements.

 $<sup>^{(2)}</sup>$  The times stated are based on  $+20^{\circ}$ C – the times will not be significantly extended at low temperatures.




# Triflex ProDrain Quartz Design

Notes: There may be slight variations in shade between actual colours and those shown below. RAL colours are approximate.

Special colours can be produced to order.

# Finish colours (including optional Triflex MicroChips): Triflex colours

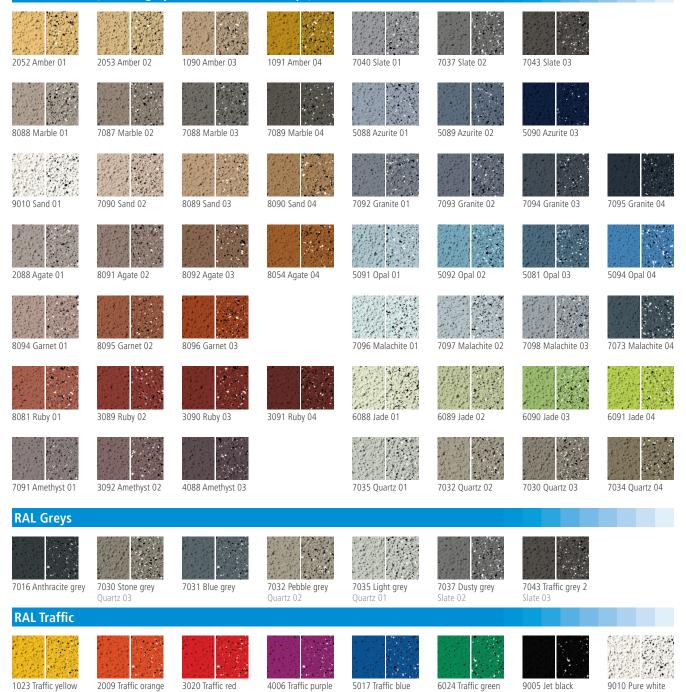

Request a sample online at triflex.co.uk/samplerequest

Find out more at triflex.co.uk

Colour card

# Triflex ProDrain Colour Design

Notes: There may be slight variations in shade between actual colours and those shown below.

# Optional finish colours: Coloured surface dressing



A719 Grey



A728 Anthracite Grey



A722 Green Grey



A721 Blue Grey



A724 Red Orange



A729 Stone Red



A727 Creme Beige



e A730 White





A720 Blue

A731 Light Grey




# Triflex ProDrain Chips Design

Notes: There may be slight variations in shade between actual colours and those shown below. RAL colours are approximate.

Special colours can be produced to order.

# Optional finish colours: Triflex colours

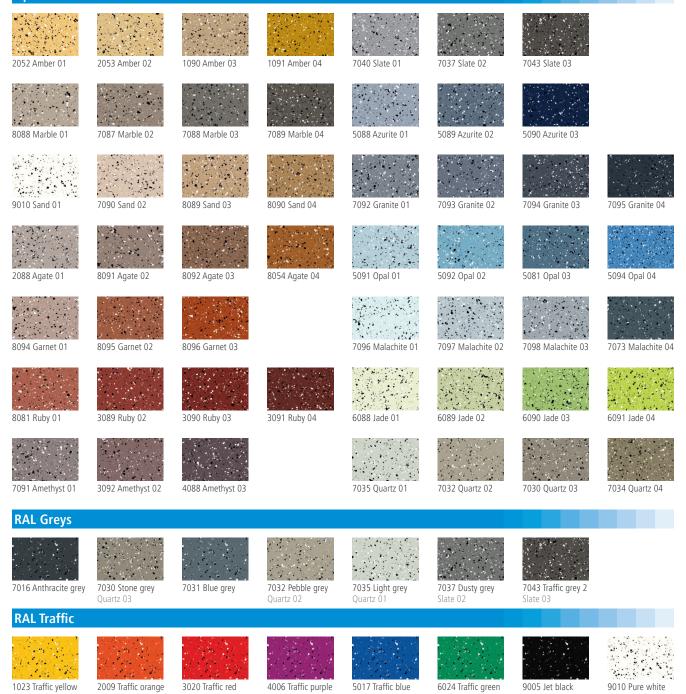

Colour card

# **Triflex ProDrain Stone Design**

Notes: There may be slight variations in shade between actual colours and those shown below, texture is indicative only.

# Stone Design finish options

### **Small Italian marble**













S100 | Giallo Sienna

S200 | Breccia Pernice S300 | Rosso Verona