


- 1 GENERIC SUBSTRATE (PREPARED)
- 2 TRIFLEX PRIMER (IF REQUIRED - REFER TO PROJECT SPECIFICATION PROPOSAL)
- 3 TRIFLEX PRODETAIL® @ 3.00Kg/m² MIN.
- 4 TRIFLEX 110g REINFORCEMENT FLEECE
- 5 TRIFLEX PROTECT® @ 3.00Kg/m² MIN.
- 6 CAPPING FIXED TO ONE SIDE OF THE TWIN KERB EXPANSION JOINT ONLY
- 7 TRIFLEX PROFIBRE @ 3.00Kg/m² MIN. APPLIED IN TWO APPLICATIONS AT 90° TO EACH OTHER @ 1.50Kg/m² MIN. TO ENCAPSULATE FIXING HEADS
- 8 CAPPING INSTALLED / REINSTATED AFTER WATERPROOFING APPLICATION

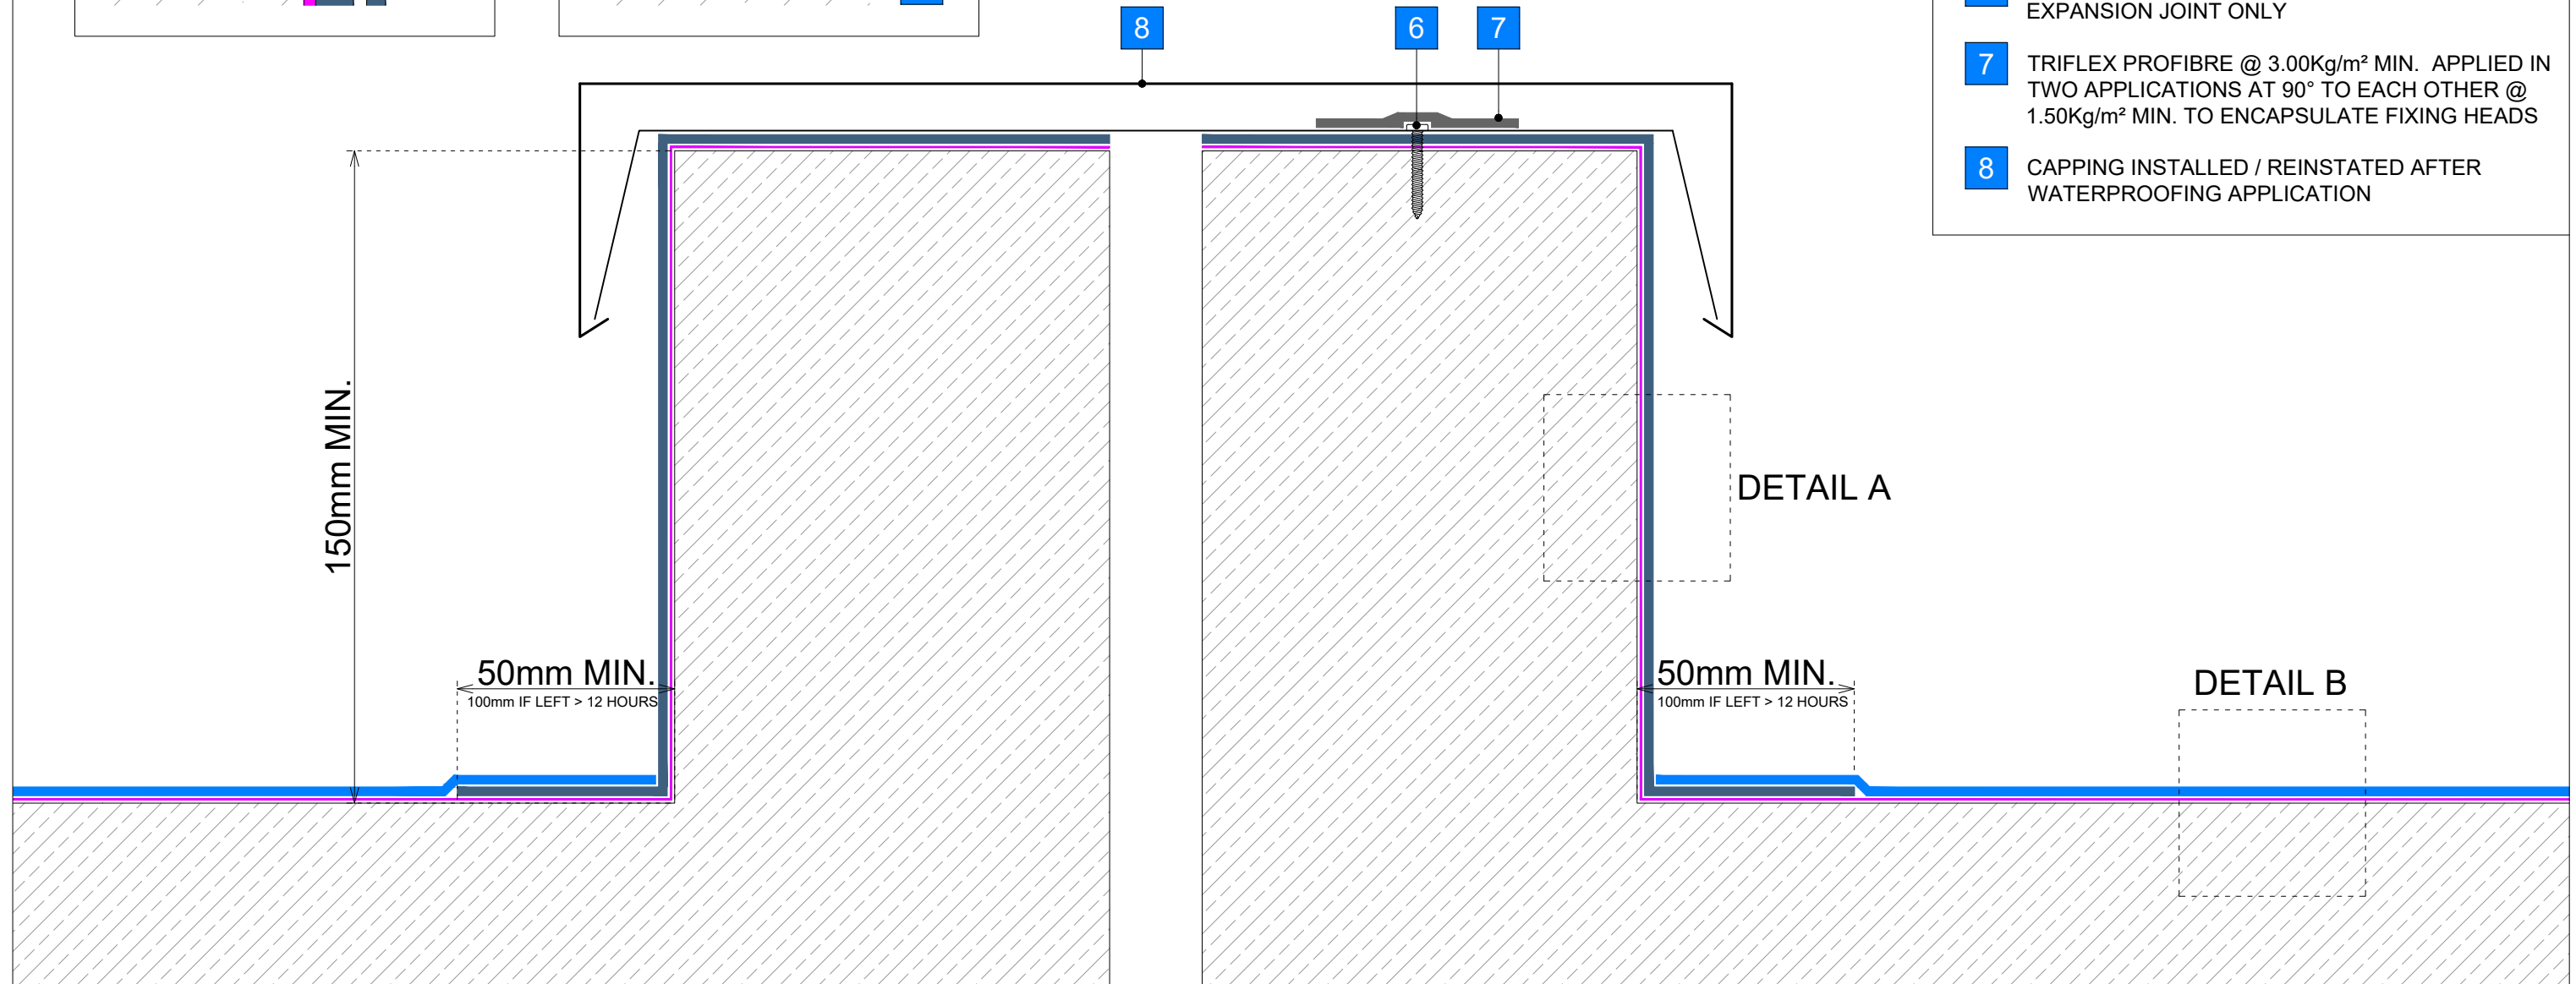

Delivering solutions together.

Whitebridge Way | Stone | Staffs
ST15 8JS | Tel: 01785 819119
www.triflex.co.uk | info@triflex.co.uk

Do not scale - use figured dimensions only and verify all dimensions on site. This drawing may not be reproduced or modified without written permission from Triflex.

31/05/2025