



DETAIL PROTECTION

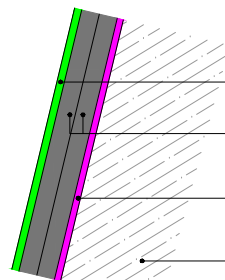


- TRIFLEX CRYL FINISH 209 @ 0.50 Kg/m² MIN.
- TRIFLEX PROFIBRE® @ 3.00 Kg/m² MIN.
APPLIED IN TWO APPLICATIONS @ 1.50 Kg/m² MIN.
- TRIFLEX PRIMER (REFER TO PROJECT
SPECIFICATION PROPOSAL)
- GENERIC SUBSTRATE (PREPARED)

MAIN AREA PROTECTION AND SURFACING

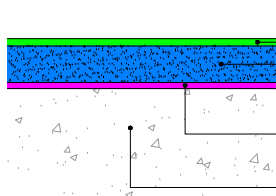

- TRIFLEX CRYL FINISH 209 @ 0.55 Kg/m² MIN.
- TRIFLEX CRYL RS 246 @ 2.40 Kg/m² MIN.
WITH TRIFLEX QUARTZ (0.4 - 1.2mm)
EMBEDDED @ 5.00 Kg/m²
- TRIFLEX PRIMER (REFER TO PROJECT
SPECIFICATION PROPOSAL)
- CONCRETE SUBSTRATE (PREPARED)

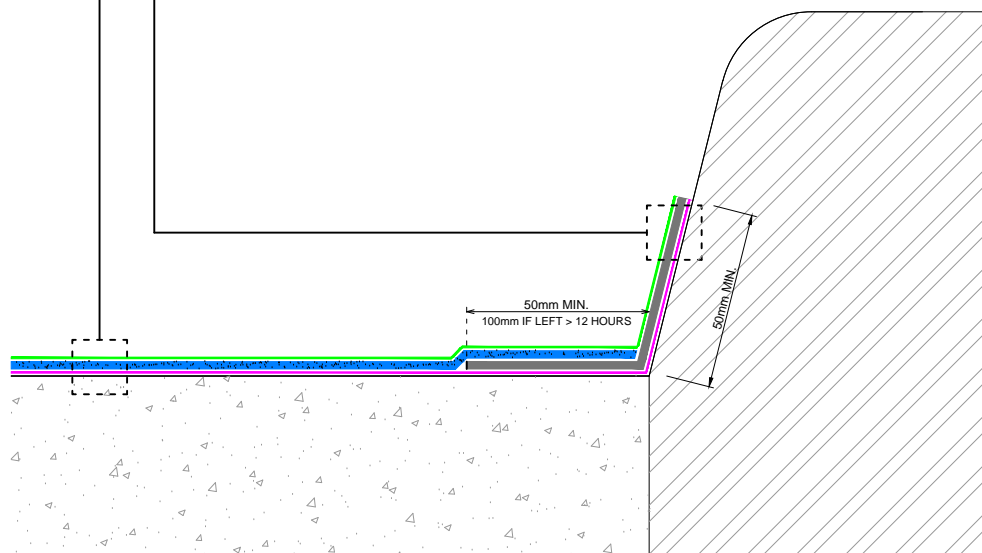


GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

INDICATIVE SYSTEM BUILD-UP

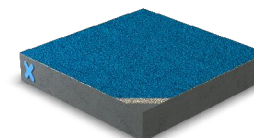

SYSTEM

TRIFLEX DCS-C WITH QUARTZ
0.4 - 1.2mm

PROJECT STANDARD

DETAIL KERB - UPSTAND LESS CRITICAL

DRAWING NUMBER

DCS-C WITH QUARTZ_018
_KERB - UPSTAND LESS
CRITICAL

SCALE NTS

DATE 13/08/2018

Triflex
Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs
ST15 8JS | Tel: 01785 819119
www.triflex.co.uk | info@triflex.co.uk



CAR PARK | MARKINGS | REPAIRS