



DETAIL WATERPROOFING

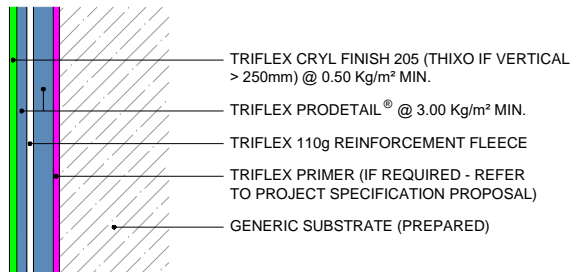


MAIN AREA WATERPROOFING

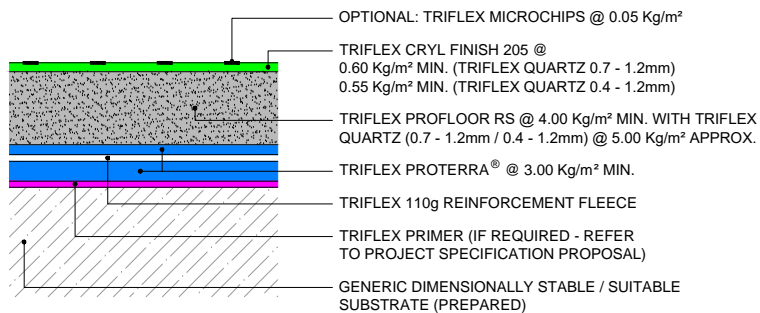

NOTES

- 1 TRIFLEX PRODETAIL® @ 1.50 Kg/m² MIN. WITH TRIFLEX QUARTZ (0.7 - 1.2mm) @ 5.00 Kg/m² APPROX. TO CREATE AN IMPACT RESISTANT KEY. ALLOW TO CURE AND REMOVE EXCESS QUARTZ.
- 2 COPING BEDDED ON QUARTZ FILLED LAYER WITH SUITABLE MORTAR / ADHESIVE

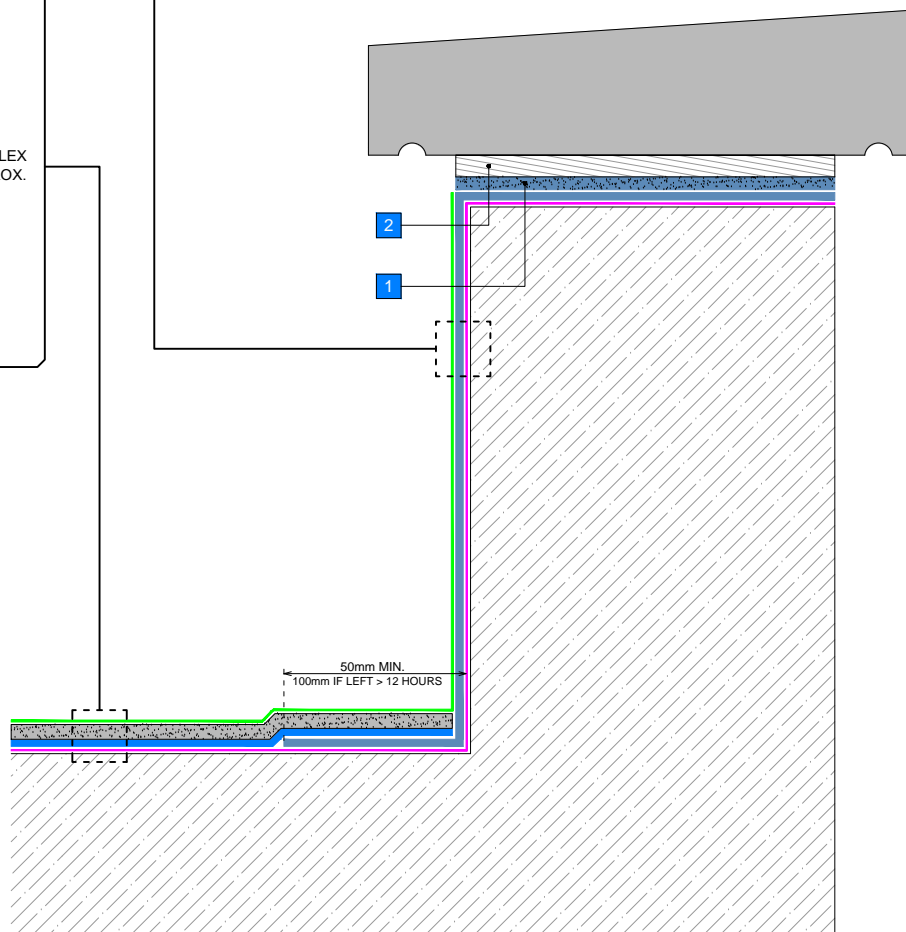


GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

INDICATIVE SYSTEM BUILD-UP



SYSTEM

TRIFLEX BTS-P COLOURSEAL - LARGE GRAIN QUARTZ

PROJECT

STANDARD

DETAIL

UPSTAND WITH COPING - WATERPROOFING BENEATH COPING

DRAWING NUMBER

BTS-P_CS_LGQ_011_UPSTAND WITH COPING -WATERPROOFING BENEATH COPING

SCALE

NTS

DATE

15/08/2018

Triflex
Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs
ST15 8JS | Tel: 01785 819119
www.triflex.co.uk | info@triflex.co.uk



WALKWAYS | BALCONIES | TERRACES