



## DETAIL PROTECTION

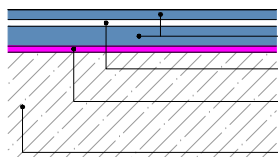


- TRIFLEX PRODETAIL<sup>®</sup> @ 3.00 Kg/m<sup>2</sup> MIN.
- TRIFLEX 110g REINFORCEMENT FLEECE
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC DIMENSIONALLY STABLE / SUITABLE SUBSTRATE (PREPARED)

## MAIN AREA WATERPROOFING

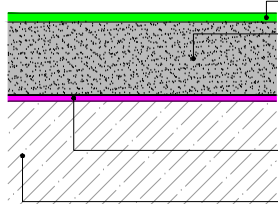

- TRIFLEX CRYL FINISH 209 @ 0.60 Kg/m<sup>2</sup> MIN.
- TRIFLEX DECKFLOOR RS @ 4.00 Kg/m<sup>2</sup> MIN. (CONCRETE)  
4.50 Kg/m<sup>2</sup> MIN. (ASPHALT)  
WITH TRIFLEX QUARTZ (0.7 - 1.2mm / 0.4 - 1.2mm)  
@ 5.00 Kg/m<sup>2</sup> APPROX.
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC DIMENSIONALLY STABLE / SUITABLE SUBSTRATE (PREPARED)

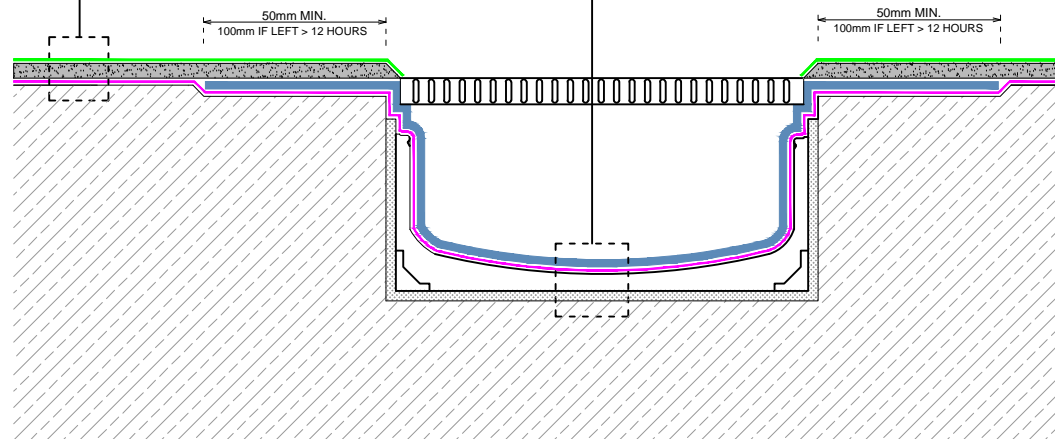


## GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

## INDICATIVE SYSTEM BUILD-UP

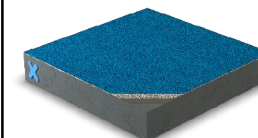

## SYSTEM

TRIFLEX DECKFLOOR WITH QUARTZ 0.7 - 1.2mm OR 0.4 - 1.2mm

## PROJECT

STANDARD

## DETAIL

DRAINAGE CHANNEL ENCAPSULATED

## DRAWING NUMBER

DECKFLOOR WITH QUARTZ  
\_101\_DRAINAGE CHANNEL ENCAPSULATED

## SCALE

NTS

## DATE

11/05/2016

**Triflex**

Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs  
ST15 8JS | Tel: 01785 819119  
www.triflex.co.uk | info@triflex.co.uk



CAR PARK | MARKINGS | REPAIRS